


## TUCANO L130S - BLOW GUN AND SPIRAL HOSE KIT

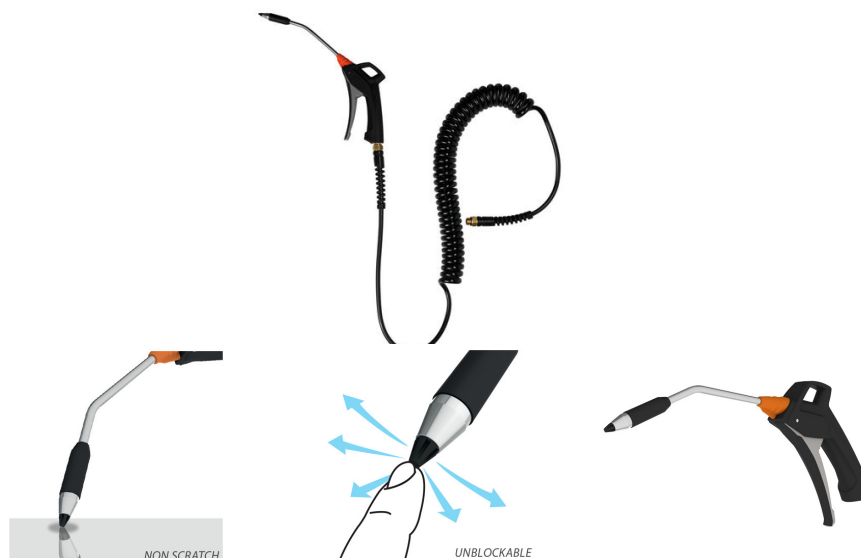

AIRSET® TUCANO

**Cod. KPPN S340 56**

Airset Tucano L130S professional blow gun, with safety nozzle, equipped with spiral hose. Offers a vented rubber nozzle, which creates a wide and efficient flow. Nozzle is silenced for a low noise level. Its rubber tip is designed for delicate surfaces or parts. This special safety nozzle is fixed on an angled stainless steel pipe, for narrow, hard-to-reach spaces; also, keep a safety distance from blown surfaces. The vented tip also prevents pressure exceeding 30 PSI (2 Bar) if the tip becomes blocked (conforms with OSHA Std 1-13.1).

### Spiral hose features

- Made of polyurethane 95 shore
- Swiveling fittings, male 1/4"
- **Fittings equipped with o-rings:** no need to put teflon on fittings, ready to use with no air leaks!
- Fitted with plastic spring guard: scratchproof, especially on delicate surfaces

### Available in different diameter and length

#### Blow gun features

- Ergonomic grip
- Designed for professional industrial use
- Made of durable materials. Metal parts made of stainless steel, corrosion resistant
- Ergonomic handle: made of soft rubber. Variable airflow trigger for a reduced noise level and increased efficiency
- Solid Brass connection 1/4": no air leaks!
- Impact resistant body
- With safety nozzle: Nozzle is silenced for a low noise level. Also, Its rubber tip is designed for delicate surfaces or parts

**Kit can be customized to fit customer needs**

Attenzione : il produttore si riserva il diritto di modificare le caratteristiche del prodotto in qualsiasi momento e senza preavviso.

**HOSE MATERIALS**

Hose	<b>Polyurethane (PU)</b>
Spring	<b>Plastic</b>
Fittings	<b>Brass</b>
O-rings	<b>Nbr</b>

**BLOW GUN MATERIALS**

Handle	<b>Nylon and rubber</b>
Thread	<b>Brass</b>
Valve	<b>Acetal and stainless steel</b>
Body	<b>Nylon</b>
Pipe	<b>Stainless steel</b>
Nozzle	<b>Rubber</b>

**TECHNICAL DATA SHEET**

Blowing force (with a 6bar - 90psi inlet)	<b>2,5 N</b>
Air consumption (with a 6bar - 90psi inlet)	<b>275 l/m - 9.7 scfm</b>
Sound level (with a 6bar - 90psi inlet)	<b>83 dB(A)</b>
Working temperature	<b>-10°/70° - 14/158 °F</b>
Max. Pressure	<b>10 Bar - 145 psi</b>

**VERSIONS**

<b>Code</b>	<b>Description</b>	<b>Colour</b>	<b>Connection</b>	<b>øHose</b>	<b>Hose length</b>
KPPN S340 56	KIT TUCANO L130 PU 5X8 - 4 m	Black	Male 1/4" BSP	5x8 mm	4 m - 13 ft

Attenzione : il produttore si riserva il diritto di modificare le caratteristiche del prodotto in qualsiasi momento e senza preavviso.