


## TUCANO L130S - BLOW GUN AND SPIRAL HOSE KIT

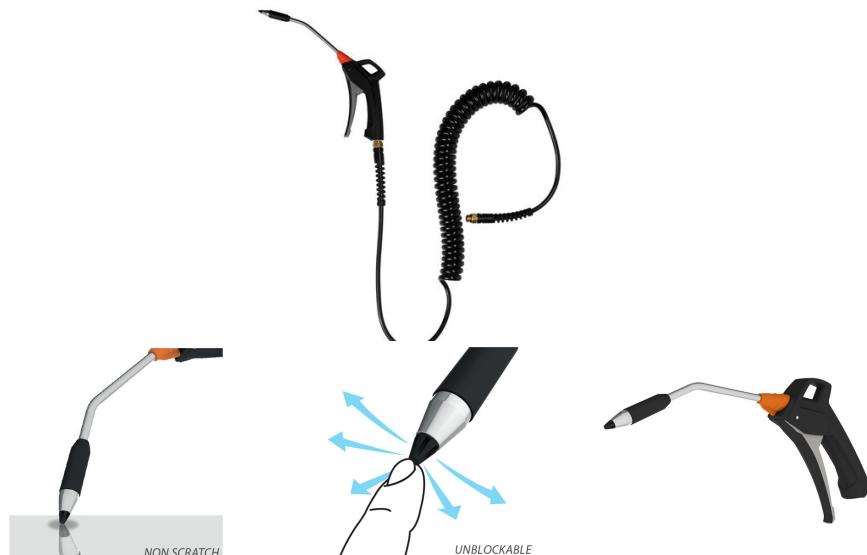

AIRSET<sup>®</sup> TUCANO

Cod. KPPN S340 56

Airset Tucano L130S professional blow gun, with safety nozzle, equipped with spiral hose. Offers a vented rubber nozzle, which creates a wide and efficient flow. Nozzle is silenced for a low noise level. Its rubber tip is designed for delicate surfaces or parts. This special safety nozzle is fixed on an angled stainless steel pipe, for narrow, hard-to-reach spaces; also, keep a safety distance from blown surfaces. The vented tip also prevents pressure exceeding 30 PSI (2 Bar) if the tip becomes blocked (conforms with OSHA Std 1-13.1).

### Spiral hose features

- Made of polyurethane 95 shore
- Swiveling fittings, male 1/4"
- **Fittings equipped with o-rings:** no need to put teflon on fittings, ready to use with no air leaks!
- Fitted with plastic spring guard: scratchproof, especially on delicate surfaces

### Available in different diameter and length

### Blow gun features

- Ergonomic grip
- Designed for professional industrial use
- Made of durable materials. Metal parts made of stainless steel, corrosion resistant
- Ergonomic handle: made of soft rubber. Variable airflow trigger for a reduced noise level and increased efficiency
- Solid Brass connection 1/4": no air leaks!
- Impact resistant body
- With safety nozzle: Nozzle is silenced for a low noise level. Also, Its rubber tip is designed for delicate surfaces or parts

### Kit can be customized to fit customer needs

Attenzione : il produttore si riserva il diritto di modificare le caratteristiche del prodotto in qualsiasi momento e senza preavviso.

## HOSE MATERIALS

|          |                   |
|----------|-------------------|
| Hose     | Polyurethane (PU) |
| Spring   | Plastic           |
| Fittings | Brass             |
| O-rings  | Nbr               |

## BLOW GUN MATERIALS

|        |                            |
|--------|----------------------------|
| Handle | Nylon and rubber           |
| Thread | Brass                      |
| Valve  | Acetal and stainless steel |
| Body   | Nylon                      |
| Pipe   | Stainless steel            |
| Nozzle | Rubber                     |

## TECHNICAL DATA SHEET

|                                             |                      |
|---------------------------------------------|----------------------|
| Blowing force (with a 6bar - 90psi inlet)   | 2,5 N                |
| Air consumption (with a 6bar - 90psi inlet) | 275 l/m - 9.7 scfm   |
| Sound level (with a 6bar - 90psi inlet)     | 83 dB(A)             |
| Working temperature                         | -10°/70° - 14/158 °F |
| Max. Pressure                               | 10 Bar - 145 psi     |

## VERSIONS

| Code            | Description                     | Colour | Connection       | øHose     | Hose length |
|-----------------|---------------------------------|--------|------------------|-----------|-------------|
| KPPN S340<br>56 | KIT TUCANO L130 PU 5X8 - 4<br>m | Black  | Male 1/4"<br>BSP | 5x8<br>mm | 4 m - 13 ft |

Attenzione : il produttore si riserva il diritto di modificare le caratteristiche del prodotto in qualsiasi momento e senza preavviso.