


## TUCANO BLOW GUN WITH FLAT NOZZLE

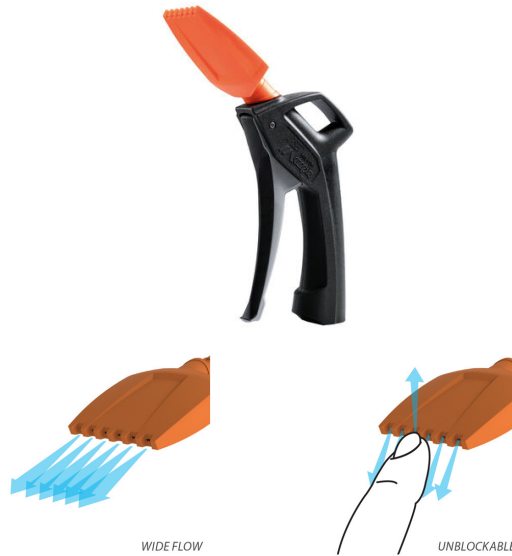

AIRSET® TUCANO

### Cod. TCN PF 4040

This blow gun offers a flat nozzle that generates a wide and strong blowing force, but at a very low noise level. Useful when blowing high amount of dust, particles or quickly drying wide surfaces. Nozzle construction is resistant to wear and its scratch-free material is suitable for sensitive applications

### Variable airflow trigger

Tucano adopts a special valve which allows a progressive control of the lever: this reduces the noise level and air consumption. In the progressive mode the operator can adjust the flow with great precision, which is useful in the most jobs. Instead, fully pressing the lever will use all the blowing force

### Ergonomic handle

Tucano offers a Soft-Touch handle, made of soft ergonomic rubber, for comfort and easy handling. This material reduces the risk of repetitive strain injuries

Attenzione : il produttore si riserva il diritto di modificare le caratteristiche del prodotto in qualsiasi momento e senza preavviso.

## TECHNICAL DATA SHEET

|                                             |                             |
|---------------------------------------------|-----------------------------|
| Blowing force (with a 6bar - 90psi inlet)   | <b>2,5 N</b>                |
| Air consumption (with a 6bar - 90psi inlet) | <b>275 l/m - 9.7 scfm</b>   |
| Sound level (with a 6bar - 90psi inlet)     | <b>80 dB(A)</b>             |
| Connection                                  | <b>1/4" BSP</b>             |
| Weight                                      | <b>136 g - 0.30 lbs</b>     |
| Working temperature                         | <b>-10°/70° - 14/158 °F</b> |
| Max. Pressure                               | <b>16 Bar - 235 psi</b>     |
| Nozzle length                               | <b>56 mm - 2"</b>           |

## MATERIALS

|            |                                   |
|------------|-----------------------------------|
| Handle     | <b>Nylon and rubber</b>           |
| Connection | <b>Brass</b>                      |
| Valve      | <b>Acetal and stainless steel</b> |
| Body       | <b>Nylon</b>                      |
| Nozzle     | <b>Nylon</b>                      |

## VERSIONS

| Code        | Description                 | Connection |
|-------------|-----------------------------|------------|
| TCN PF 4040 | Airset Tucano Blow Flat BSP | 1/4" BSP   |
| TCN PF 4041 | Airset Tucano Blow Flat NPT | 1/4" NPT   |

## REGULATIONS

|                                                                       |
|-----------------------------------------------------------------------|
| <b>OSHA STD 1-13.1</b> Max. 2 bar / 30 psi if the tip becomes blocked |
| <b>EU 2003/10/CE</b> Max. 85 dB                                       |
| <b>OSHA 1910.95 (b)</b> Max. 90 dB 8h                                 |

Attenzione : il produttore si riserva il diritto di modificare le caratteristiche del prodotto in qualsiasi momento e senza preavviso.